

WATER PURIFIERS



+27 60 999 9140


info@microanalytica.co.za

489 Jacqueline Drive, Garsfontein
Pretoria, Gauteng, 0081

ANALYTICAL EXCELLENCE...

www.microanalytica.co.za

Water Purifier (Automatic RO Water) MA-II

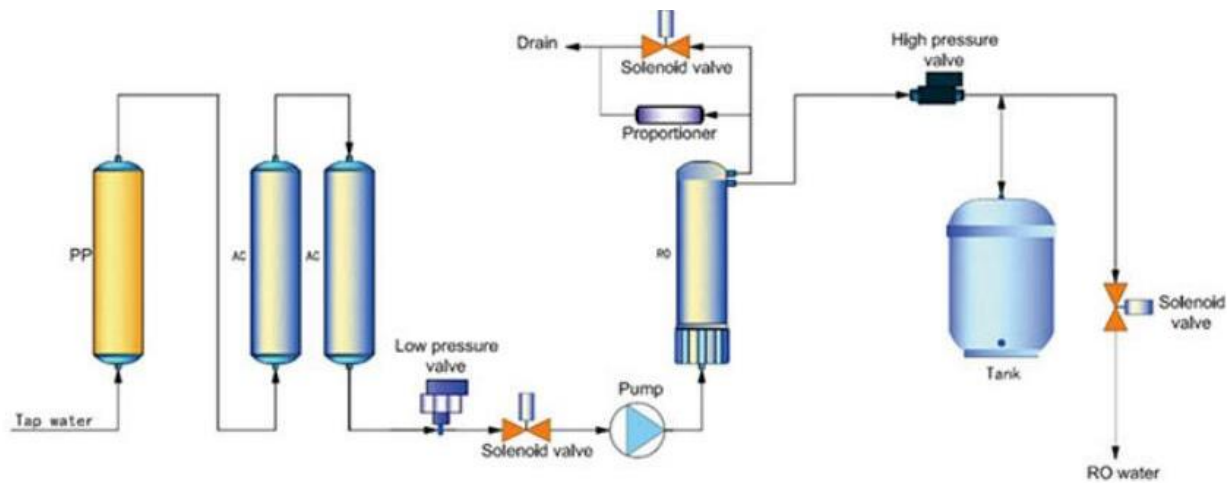

MODEL SPECIFICATIONS:

Model		MA-II 15	MA-II 30
Water Output Type		RO water	
Water Output Speed		15 L/H	30 L/H
Purifying Procedure		PF+AC+RO+AC	
Water Supply Requirement		Tap water: TDS<200 ppm, 5~45°C, 1.0~4.0Kgf/cm ² (If inlet TDS>200ppm, extra pre-treatment filter is recommended)	
Purification System	Pre-treatment Unit	PP filter*1 (MA-II 15); PP cotton filter*1 (MA-II 30); Special active carbon filter*2	
	RO Unit	100GPD RO membrane*1	200GPD RO membrane*1
Pure water quality	Ion Rejection Rate	97%~99% (New RO membrane)	
	Organic Rejection Rate	>99%, when MW>200 Dalton	
	Particles and Bacteria Rejection Rate	>99%	
	Bacteria	<0.1cfu/ml (with optional 0.45+0.1µm PES terminal filter)	
	Particles (>0.2µm)	<1/ml (with optional 0.45+0.1µm PES terminal filter)	
Flow Rate		2.0 L/min (with pressure tank)	
Water Quality Monitor		TDS/conductivity test pen	
Consumption		72W	
Power Supply		AC220V±10%, 50Hz+5% (standard); AC110V, 60Hz (optional)	
Standard Configuration		Main body (includes 1 set of purification column), 15L tank, TDS /conductivity test pen, accessory pack	
External Size (W*D*H)		410*220*420mm	
Package size (W*D*H)		600*490*580mm	
Gross weight (kg)		35	